ACRYLOC ARMOURFLEX EXTERIOR ACRYLIC

PRODUCTS EXP401 Armourflex Exterior Acrylic Matt
EXP405 Armourflex Exterior Acrylic Low Sheen

CODES 28520 (EXP401)
28550 (EXP405)

PACKAGING Heavy Duty Plastic Pail

DESCRIPTION Acryloc Exterior Acrylic, formulated using water based pure acrylic binder, titanium dioxide pigment, quality mineral extenders and a powerful fungicide.

USES Acryloc *Exterior Acrylic* is a low odour, durable high-build exterior coating providing long-term protection for all masonry surfaces. *Exterior Acrylic* is available in Matt (EXP 401) and Low Sheen (EXP405) finishes.

A range of attractive texture finishes can be achieved using specialized rollers and the high film build makes the product ideal for coating surfaces such as primed Exterior Masonry Walls, cement render, masonry, and concrete walls. This product can be tinted to a wide range of colours.

SUBSTRATES

- Tilt Panel Walls
- General Exterior Masonry Walls
- AAC (Autoclaved Aerated Concrete)
- Cement Render
- Fibre Cement Sheeting
- Off Form Concrete
- Texture Coat
- Most Primed Exterior Substrates

TECHNICAL SPECIFICATION

- Appearance - Coloured Liquid
- Odour - Low
- Resin Type - 100% Acrylic
- Application - Brush, Roller, Spray
- S G - 1.5 Kg/Litre
- Coverage - 8-10m²/ Litre
- Volume Solids - 38%
- Weight Solids - 58%
- Dry Time - 1 to 2 Hours

FEATURES & BENEFITS

- Excellent Weather Resistance
- Excellent Durability
- Low Maintenance
- Excellent Crack Resistance
- Easy And Safe Clean Up
- Easy to Apply
- Strong Adhesion
- Tint to Over 2000 Colours

PERFORMANCE TABLE

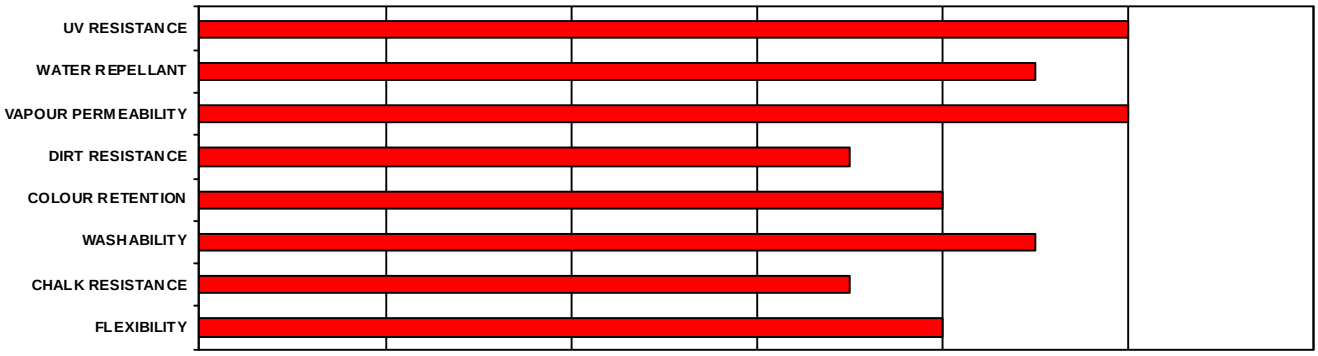

acryloc®
building products

February 2009