

ACRYLOC INTERIOR ACRYLIC

PRODUCTS EXP301 Interior Acrylic Low Sheen
EXP321 Exterior Acrylic Satin

CODES 28560 (EXP301)
28580 (EXP321)

PACKAGING Heavy Duty Plastic Pail

DESCRIPTION Acryloc *Interior Acrylic* is a low odour, quick drying, and washable interior paint formulated using water based acrylic binder, high-hiding titanium dioxide pigment, quality mineral extenders and a powerful fungicide suitable for use in wet areas. *Interior Acrylic* is available in a Lo Sheen (EXP301) and Satin finish (EXP321).

USES Acryloc *Interior Acrylic* is excellent for use over painted, primed or sealed surfaces to provide an excellent lustre. Formulated for easy flow, it leaves a smooth surface and a uniform finish. Recommended for both new and remodelled areas and is great for interior walls, ceilings, doors, trims, panelling and any other surface where high quality paint is required. This product can be tinted to a wide range of colours.

SUBSTRATES

- Plasterboard Ceilings and Walls
- Hard Plaster Ceilings and Walls
- Doors Trims and Panelling
- General Interior Masonry Walls
- Interior Cement Render
- Interior Fibre Cement Sheeting
- Most Other Primed Interior Substrates


TECHNICAL SPECIFICATION

- Appearance - Coloured Liquid
- Odour - Low
- Resin Type - 100% Acrylic
- Application - Brush, Roller, Spray
- S G - 1.3 Kg/Litre
- Coverage - 12-15m²/ Litre
- Volume Solids - 35%
- Weight Solids - 50%
- Dry Time - 1 to 2 Hours

FEATURES & BENEFITS

- Fast Drying
- Excellent Durability
- Low Odour
- Easy And Safe Clean Up
- Easy to Apply
- Strong Adhesion
- Tint to Over 2000 Colours

PERFORMANCE TABLE

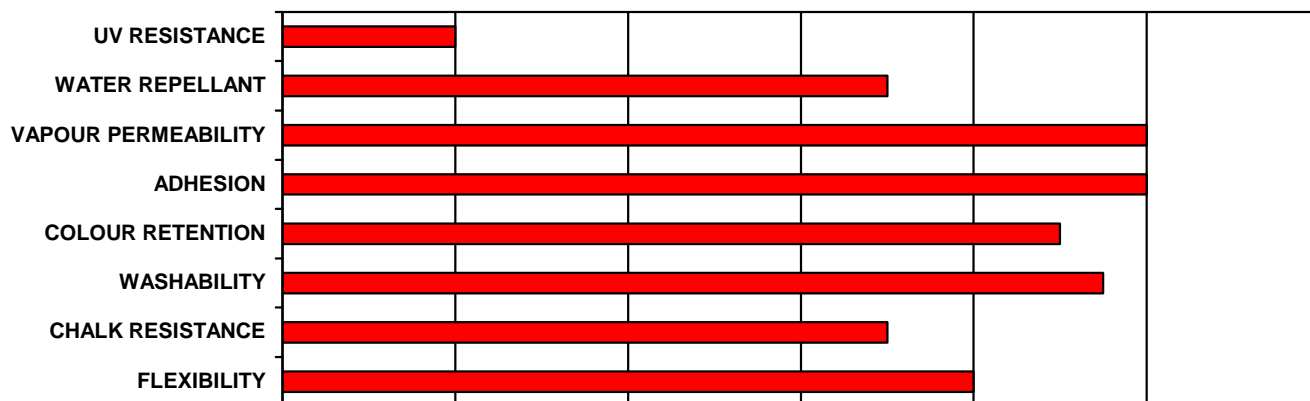

acryloc[®]
building products